




HF100 Compression Driver

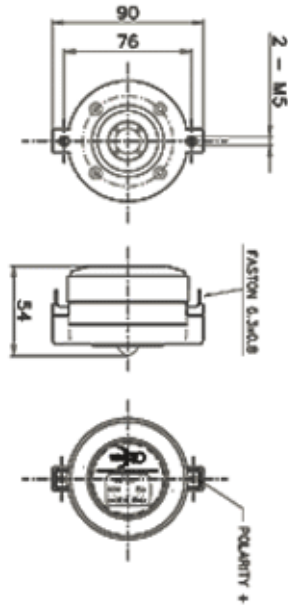

NOMINAL SPECIFICATIONS

Overall Diameter	86 mm (3.39 in)
Depth	54 mm (2.13 in)
180° Mounting Holes Diameter (2xM6)	76 mm (2.99 in)
Net Weight	570 g (1.26 lb)
Shipping Box	147x130x82 mm (5.79x5.12x3.23 in)
Shipping Weight	650 g (1.43 lb)
Throat Diameter	25,4 mm (1 in)

ORDERING CODES

Faston Terminals - 8 Ohm Version	00253938
Faston Terminals - 16 Ohm Version	

ELECTRICAL SPECIFICATION

Nominal Impedance	8 ohm
Minimum Impedance	7 ohm
Re	6 ohm
Minimum Crossover Frequency *	2.6 kHz
Sensitivity (1W/1m) **	106 dB
Frequency Range	1.5÷20 kHz
Nominal Power Handling ***	30 W
Maximum Power Handling ****	60 W
Diaphragm Material	Ketone Polymer
Voice Coil Diameter	26 mm (1.02 in)
Winding Depth	1.7 mm (0.07 in)
Former Material	Kapton
Magnetic Gap Depth	2 mm (0.08 in)
Flux Density	1.4 T
Winding Material	Copper Clad Aluminium

NOTES

Driver mounted on a 1" 50° x 40° horn

(*) 12 dB/oct or higher slope high-pass filter

(**) Averaged within the frequency range

(***) Test made for 2 hours with Pink Noise signal (6 dB Crest Factor) from minimum crossover frequency. Power calculated on rated minimum impedance. Driver mounted on aluminium horn.

(****) Maximum power is defined as 3dB greater than nominal power.

CURVES

