

## BASS GUITAR SERIES

# LEGEND CB158

Recommended for professional bass guitar applications in a sealed or vented enclosure.



### SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating**	
Watts	300 W
Music Program	600 W
Resonance	34 Hz
Usable Frequency Range	47 Hz – 3 kHz
Sensitivity***	98.2 dB
Magnet Weight	80 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	2.5", 64 mm

### THIELE & SMALL PARAMETERS\*

Fs	34 Hz
Re	6.15 Ω
Le	0.33 mH
Qms	5.9
Qes	0.36
Qts	0.34
Vas	11.87 cu.ft., 336.1 liters
Vd	411 cc
Cms	0.31 mm/N
BL	16 T-M
Mms	70 grams
EBP	95
Xmax	4.8 mm
Sd	856.3 cm <sup>2</sup>
Xlim	9.5 mm


### MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	54–65 liters, 1.9–2.3 cu.ft.
Vented	54–159 liters, 1.9–5.6 cu.ft.
Driver Volume Displaced	0.138 cu.ft., 3.92 liters
Overall Diameter	15.22", 386.6 mm
Baffle Hole Diameter	13.99", 355.4 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.5", 165.1 mm
Net Weight	17.3 lbs , 7.85 kg
Shipping Weight	19.4 lbs , 8.8 kg

### MATERIALS OF CONSTRUCTION

Copper voice coil  
 Polyimide former  
 Ferrite magnet  
 Vented and extended core  
 Die-cast aluminum basket  
 Paper cone  
 Cloth cone edge  
 Solid composition paper dust cap

### 8 Ω FREQUENCY RESPONSE\*

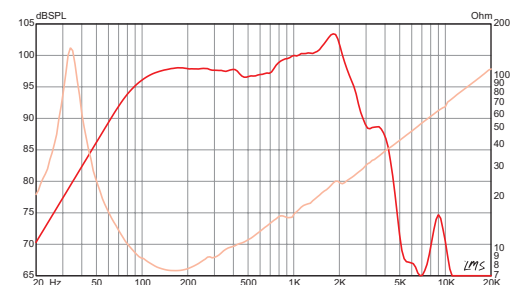



*From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.*

## MISSION STATEMENT

*Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.*

## FOOTNOTES

- \* Please consult [www.eminence.com](http://www.eminence.com) for specifications of models with alternative impedances.
- \*\* Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.
- \*\*\* The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).
- \*\*\*\* BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.
- \*\*\*\*\* Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.
- \*\*\*\*\*The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

**EMINENCE SPEAKER LLC**

838 Mulberry Pike, Eminence, KY 40019



Follow us:

[EMINENCE.COM](http://EMINENCE.COM)

